

- **RED-GREEN-BLUE-WHITE**

BIT	EFFECT
0-255	LED OFF TO LED ON

- **DIMMER**

BIT	EFFECT
0-255	NO LIGHT TO FULL LIGHT

- **STROBE**

BIT	EFFECT
252-255	OPEN
239-251	RANDOM FAST STROBE
226-238	RANDOM MEDIUM STROBE
213-225	RANDOM SLOW STROBE
208-212	OPEN
108-207	SLOW TO FAST PULSATION
104-107	OPEN
4-103	SLOW TO FAST STROBE
0-3	CLOSED

- **RED LED 1 to...**
- **GREEN LED 1 to...**
- **BLUE LED 1 to...**
- **WHITE LED 1 to...**

BIT	EFFECT
0-255	LED OFF TO LED ON

RESET:

BIT	EFFECT
128-255	COMPLETE RESET
77-127	PAN/TILT RESET
26-76	ZOOM RESET
0-25	UNUSED RANGE

- **ZOOM**

BIT	EFFECT
0-255	NARROW TO WIDE BEAM

- **ZOOM ROTATION**

BIT	EFFECT
193-255	SLOW TO FAST FORWARD ROTATION
191-192	STOP
128-190	SLOW TO FAST BACKWARD ROTATION
0-127	LINEAR ROTATION

7X15W LED BIG-EYE LIGHT

4 IN 1

USER MANUAL



MODWL:LED-B0715

Product Information:

7pcs 15W 4-in-1 ZOOM moving head beam light

Voltage: AC90-240V 50-60Hz

Power: 180W

Source: 7pcs 15W high brightness OSRAM 4-in-1 LEDs

ZOOM: 3 ZOOM motors work together with the same step

Working lifetime: 100,000 hours with low power consumption

Channel: 27/55 double channels mode

Control: DMX512/Master-slave/Auto/Sound

Strobe: 1-25 times/second

PAN: 540 degree with 16bit rotate

Tilt: 270 degree with 16bit rotate

Beam angle: 8-50 degrees

Color: RGBW infinite mixture

Dimmer: 0-100% linear dimming system

Display: LCD blue display with Chinese and English.

Protection: Auto temperature control system with big cooling fan.

Function: With LED shutter, scan position memory and auto reposition.

Built-in programs with macro effects.

with much function

Very fast and smooth Pan/Tilt speed, Super low noise

More than 40000 Lux output at 2 meters

179	Lilac Tint	100-109	Dark yellow green
175-178	Daylight Blue	89-99	Just Blue
174	Flame Red	78-88	Sky Blue
172-173	Bastard Amber	68-77	Lavender
168-171	Deep Orange	62-67	Light Lavender
162-167	Pale Gold	49-61	Pink Carnation
157-161	Apricot	46-48	Medium Pink
151-156	Bright Blue	45	Light Pink
149-150	Primary Green	35-44	Sunrise Red
147-148	Special lavender	32-34	Dark Amber
146	Pale Lavender	31	Gold Amber
145	Deep Golden Amber	30	Medium Amber
142-144	Medium Blue	29	Fire
138-141	Bright Pink	27-28	Surprise Peach
136-137	Mauve	23-26	Straw Tint
134-135	Dark Green	20-22	Medium Yellow
131-133	Leaf Green	19	Black
129-130	Dark Blue	18	White 5000K
128	Light Blue	17	White 3700K
127	Steel Blue	16	White 7000K
126	Med Blu Green	15	Magenta
125	Peacock Blue	14	Yellow
123-124	Magenta	13	Cyan
121-122	Dark Pink	12	Blue
120	Middle Rose	11	Green
119	Light Salmon	10	Red
118	English Rose	0-9	Macro color OFF


28	Red LED 1
29	Green LED 1
30	Blue LED 1
31	White LED1
...	Red LED ...
...	Green LED ...
...	Blue LED ...
51	Red LED 7
52	Green LED7
53	Blue LED7
55	White LE7

● **LINEAR CTO**

BIT	EFFECT
224-255	8000K
188-223	7000K
144-187	6000K
117-143	5000K
99-116	4000K
54-98	3200K
10-53	2500K
0-9	UNUSED RANGE

● **MACRO CLOUR**

BIT	COLOR	BIT	COLOR
209-255	White	117	Light Rose
208	Dirty White	115-116	Orange
207	Alice Blue	114	Deep Amber
191-206	Congo Blue	113	Straw
184-190	Dark Steel Blue	112	Light Amber
180-183	Deep lavender	110-111	Spring Yellow

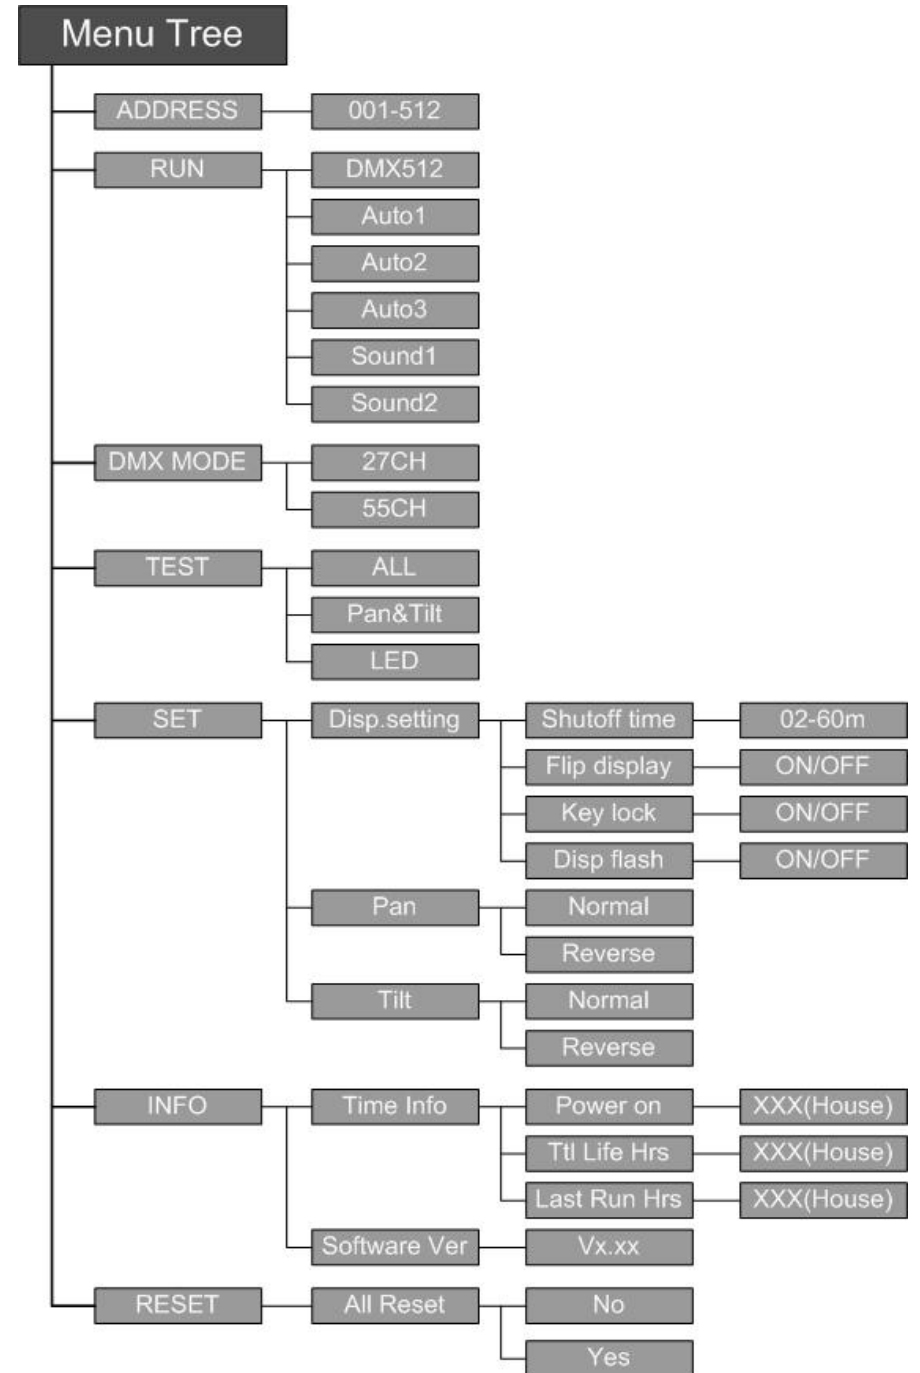

DMX MODE:**27CH**

CHAN-NEL	CHANNEL MODE
1	Pan
2	Pan Fine
3	Tilt
4	Tilt Fine
5	Dimmer
6	Strobe
7	Red
8	Green
9	Blue
10	White
11	Linear CTO
12	Macro color
13	Function
14	Zoom
15	Zoom Rotation
16	Shape Selection
17	Shape Speed
18	Shape Fade
19	Shape R
20	Shape G
21	Shape B
22	Shape W
23	Shape Dimmer
24	Background Dimmer
25	Shape Transition
26	Shape Offset
27	Reset

55CH

CHAN-NEL	CHANNEL MODE
1	Pan
2	Pan Fine
3	Tilt
4	Tilt Fine
5	Dimmer
6	Strobe
7	Red
8	Green
9	Blue
10	White
11	Linear CTO
12	Macro color
13	Function
14	Zoom
15	Zoom Rotation
16	Shape Selection
17	Shape Speed
18	Shape Fade
19	Shape R
20	Shape G
21	Shape B
22	Shape W
23	Shape Dimmer
24	Background Dimmer
25	Shape Transition
26	Shape Offset
27	Reset